



BIOSENSING WITH U-SHAPED FIBER SMEARED WITH GOLD NANOPARTICLES

Dr. E. Gajendran*, Dr. J. Vignesh** &
Dr. S. R. Boselin Prabhu***

* Associate Professor, Department of Computer Science and Engineering, Sree Dattha Group of Institutions, Hyderabad, Telangana

** Professor, Department of Computer Science and Engineering, Sreyas Institute of Engineering and Technology, Hyderabad, Telangana

*** Associate Professor, Department Electronics and Communication Engineering, VSB Engineering College, Karur, Tamilnadu

Cite This Article: Dr. E. Gajendran, Dr. J. Vignesh & Dr. S. R. Boselin Prabhu, "Biosensing With U-Shaped Fiber Smeared With Gold Nanoparticles", International Journal of Multidisciplinary Research and Modern Education, Volume 3, Issue 1, Page Number 410-413, 2017.

Copy Right: © IJMRME, R&D Modern Research Publication, 2017 (All Rights Reserved). This is an Open Access Article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Abstract:

Biosensors are logical devices composed of a recognition component of biological origin and a physico-chemical transducer. Immobilization plays a foremost character in developing the biosensor by incorporating both the above mentioned mechanisms. In this paper, an analytical review of fiber optic sensors and biosensors towards real world applications for environmental and clinical monitoring have been reviewed. The establishment of sensor systems has elated recompenses such as measurement in flammable and explosive atmospheres, resistance to electrical noises, trimness, geometrical suppleness, measurement of slight sample volumes, remote sensing in unreachable sites or harsh atmospheres and multi-sensing.

Key Words: Fiber-Optic Sensor, Chemical Sensor, Enzymatic Sensor, Complete Cell Biosensor, Control of Biologicals, Tapered Optical Fiber, Optical Chemical Sensor, Chemical Equilibrium, Biosensors, Physico-Chemical Transducer & Environmental and Clinical Monitoring.

1. Introduction:

Chemical and thermal stability of quartz glass, which is the material of predominant OF for the spectral range from ultraviolet to mid-infrared, are equivalent only with platinum [1-4]. The significant ethics of fiber optic sensor (FOS) operation were engaged and the modern expansions in optical fiber devices and their solicitations to sensor technology in numerous areas are industry, transportation, communication, safety and defense as well as in daily life. Chemists used to engage sensors with electrodes as pH, Clark and ion-selective electrode. Amid fiber optical chemical sensors, which are fewer commercially obtainable, only sensors of oxygen converted to be more used. An operative way of acquisition of the biological selectivity is a combination of cell cultures, tissue slices, organs and occasionally of whole living creatures with the transducer. Optical sensors can be based on plentiful optical principles (absorbance, reflectance, luminescence and fluorescence), covering unrelated regions of the spectra (UV, Visible, IR and NIR) and allowing the dimension not only of the strength of light, but also of other supplementary properties such as lifetime, refractive index, scattering, diffraction and polarization.

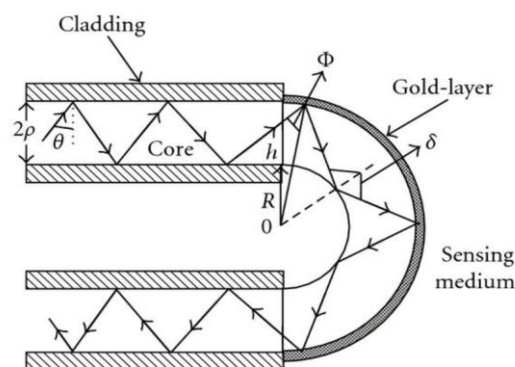


Figure 1: Biosensing with U-shaped fiber smeared with gold nanoparticles (GNP)

As an instance, a luminescent sensor can be built by connecting a sensing element, which emits light in communication with a precise analyte, with a photodiode, which fluctuates the energy of the incident light into a measureable signal [5-8]. Optical chemical sensors have plentiful compensations over traditional electricity-based sensors like electivity, protection to electromagnetic interference and comfort while working with flammable and explosive compounds. They are also subtle, non-destructive and have numerous

capabilities. Though, besides a number of paybacks, optical sensors also exhibit disadvantages: ambient light can obstruct with their operation, the long-term steadiness is restricted due to indicator leaching or photo-bleaching, there may be an insufficient dynamic range, selectivity may be underprivileged and a mass transfer of the analyte from the sample into the indicator phase is indispensable in order to obtain an analytical signal [9-12]. Fiber-optic chemical sensors (FOCSs) describe a subclass of chemical sensors in which an optical fiber is typically employed to transmit the electromagnetic radiation to and from a sensing area that is in straight contact with the sample. The spectroscopically detectable optical stuff can be restrained through the fiber optic arrangement which authorizes remote sensing [17-21].

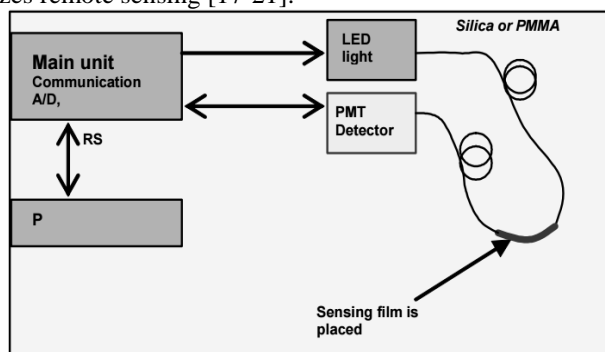


Figure 2: IPE Sensor of oxygen and glucose

In addition to advantages in terms of stinginess, ease of miniaturization, gaining safe, small, lightweight, compressed and inexpensive sensing systems, a wide inconsistency of sensor designs are possible. The most common taxonomy of FOCs distinguishes between the intrinsic and extrinsic types of sensors. 1) In the intrinsic type of FOCs, the sensing approach is based on the variation in light transmission features due to the modification happening in a fiber property (e.g., refractive index or length) upon the communication with the analyte or the system being intended. The optical fibre itself has sensory features [13]. This type of sensor is frequently applied to measure corporeal or physicochemical constraints such as the pressure, temperature or enthalpy of reactions. 2) In the extrinsic type of FOCs, the optical fiber acts as a transmission media by means of managing the radiation from the source to sample or from the sample to the end detection system. Extrinsic sensors can be segmented into a) distal and b) lateral types.

The most communal are distal-type sensors, in which the indicator is stopped at the distal end (tip) of the optical fibre. Else, in a lateral sensor, the sensing chemistry can be immobilized along a section of the core of the optical fibre to make a momentary field sensor. Nevertheless, the most frequently applied methods in optical sensing are those grounded on light absorption or light emission.

Related to absorption-based methods, the molecular emission (i.e., fluorescence, phosphorescence, and generally speaking, luminescence) is primarily important because of its abundant sensitivity and decent specificity. The sensitivity of luminescence approaches is about 1000 times superior to that of most spectrophotometric methods. In addition, inferior limits of detection for the anticipated analytes can be accomplished. Calculating the emission intensity is also the most predominant because the instrumentation needed is very modest and low-priced. Nevertheless, measuring the light emission intensity has some inadequacies compared to emission lifetime measurements, in which the model is stressed only by a pulse of EM moderately than via unceasing illumination which is the case with intensity-based approaches [14]. The exactness and correctness of luminescence intensity-based schemes are suggestively affected by fluctuations in the light-source's intensity, detector warmth, inner filter special properties, indicator absorption (bleaching and leaching), sample turbidity and sensing layer wideness. Conversely, some of these difficulties can be reduced or even overcome by measuring luminescence lifetimes instead of intensities. But again, lifetime measurements also have some shortcomings, which are the instrumentation difficulty and high costs, along with an insufficient number of indicator dyes available that display noteworthy analyte-dependent changes in the lifetime [15].

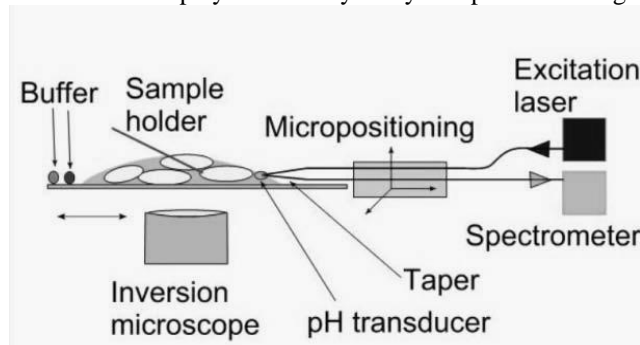


Figure 3: V Taper

Alternative way to diminish the difficulties related with intensity as well as with lifetime detection ethics is the use of ratiometric measurements. This technique employs dual-emission or dual-excitation indicators or combinations of two luminophores, displaying detached spectral areas with varied behavior. For illustration, the ratio of two fluorescent peaks is used in its place of the total intensity of one peak [16]. The sensors therefore typically contain a reference dye; the benefit of this method is that factors such as excitation source fluctuations and sensor concentration will not interrupt the ratio between the Fiber optics serve analytical sciences in abundant ways. First, they enable optical spectroscopy to be attained on sites inaccessible to conventional spectroscopy over enormous distances or even on several spots beside the fiber [22-25].

Second, fiber optics in being waveguides, enable less communal methods of interrogation, in specific evanescent wave spectroscopy. Fibers are obtainable now with transmissions over a wide spectral range. Major Fields of applications are in medical and chemical analysis, molecular biotechnology, maritime and environmental examination, industrial production observing and bioprocess control and the automotive industry. Active current areas of research include progressive methods of examination such as time-resolved or spatially determined spectroscopy, evanescent wave and laser-assisted spectroscopy, surface plasmon resonance and multidimensional data acquisition. In current years, fiber bundles also have been employed for tenacities of imaging, for biosensor arrays or as arrays of nonspecific sensors whose distinct signals may be processed via artificial neural networks.

2. Various Types of Biosensors:

Biosensors can be categorized according to bio-recognition system. The biological elements used in biosensor technology are the enzymes, antibody or antigens and nucleic acids or harmonizing sequences.

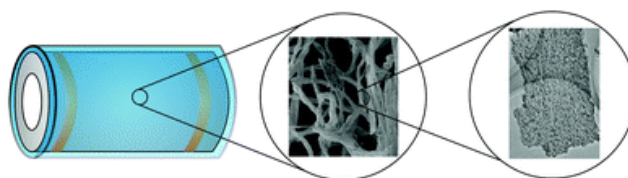


Figure 4: Microstructure fibers sensitive to gaseous oxygen

In addition, microorganisms, animal or plant whole cells and tissue slices, can also be shared in the bio-sensing system. Reliant on the method of signal transduction, biosensors can also be divided into dissimilar groups: electrochemical (amperometric, potentiometric or conductometric), optical, thermometric and piezoelectric. Biosensors offer numerous profits over conservative analytical techniques. The judgement of the biological sensing element offers an instance for the development of tremendously specific devices for real-time analysis in complex mixtures, without the need for comprehensive sample pre-treatment or great sample volumes. The determination of a biosensor will be contingent on the biochemical specificity of the biologically active material. Biosensors also promise highly sensitive, rapid, reproducible and simple-to operate investigative tools. Biomolecules have destitute stability in solutions hence it is important to stabilize them by immobilization. Thus immobilization plays an imperative role in developing stable bio-component for incorporation with transducers. Among the numerous biosensors for methyl parathion recognition, principal schemes are normally grounded on acetylcholinesterase (AChE) and organophosphorus hydrolase (OPH) enzymes.

AChE biosensor is based on enzyme inhibition mechanism, hence it requires longer incubation time and also has underprivileged specificity because of interference from carbamate insecticide and metals. OPH catalyzes hydrolysis of methyl parathion pesticide into obvious product p-nitrophenol (PNP) and yields dual protons as a result of the cleavage of the P-O bond. Products that are chromophoric or electroactive can be perceived by colorimetric and electrochemical approaches, and are burdened to advance biosensors for discovery of methyl parathion pesticide. The analyte can be determined, as the rate of product development is unswervingly proportional to the concentration of the analyte. As the OPH is a periplasmic enzyme, complete cells can be immobilized straight on the matrix and integrated with transducers for biosensor development.

3. Conclusion:

Biosensors are rational devices composed of a recognition component of biological origin and a physico-chemical transducer. Immobilization shows a leading character in developing the biosensor by integrating both the above mentioned mechanisms. In this paper, an analytical review of fiber-optic sensors and biosensors for the development of biosensors for environmental and clinical monitoring have been revised. Reliant on the method of signal transduction, biosensors can also be distributed into dissimilar groups: electrochemical, optical, thermometric and piezoelectric. Biosensors offer many profits over conventional analytical techniques. Biosensors are rational devices composed of a recognition component of biological origin and a physico-chemical transducer. Immobilization plays a foremost role in developing the biosensor by integrating both the above stated mechanisms. In this paper, an investigative review of fiber-optic sensors and biosensors for the development of biosensors for environmental and clinical monitoring have been appraised.

4. References:

1. D'Souza, S. F. Immobilization and Stabilization of Biomaterials for Biosensor Applications. Applied Biochemistry and Biotechnology – Enzyme Engineering and Biotechnology 96 (2001): 225-38.
2. Hamid Ali Abed Al-Asadi, "Temperature dependence of the lasing characteristics of vertical cavity surface emitting lasers," Engineering Journal of Technology University, Vol. 145, 1994.
3. Boselin Prabhu S.R. and Sophia S., "Environmental monitoring and greenhouse control by distributed sensor Network", International Journal of Advanced Networking and Applications, 5(5), 2014.
4. Boselin Prabhu S.R. and Sophia S., "Greenhouse control using wireless sensor network", Scholars Journal of Engineering and Technology, 2(4), 2014.
5. Hamid Ali Abed Al-Asadi, "Temperature dependence of the noise characteristics of Multiissection semiconductor lasers," Science Journal, vol. 7, No. 3, 2001.
6. Hamid Ali Abed Al-Asadi, "Linewidth characteristics of vertical cavity surface emitting lasers due to external optical feedback," Science Journal, vol. 8, 2001.
7. Boselin Prabhu S.R. and Sophia S., 'Modern cluster integration of advanced weapon system and wireless sensor based combat system', Scholars Journal of Engineering and Technology, 2(6A), 2014.
8. Boselin Prabhu S.R. and Sophia S., 'A review of efficient information delivery and clustering for drip irrigation management using WSN', International Journal of Computer Science and Business Informatics, 14(3), 2014.
9. Hamid Ali Abed Al-Asadi, "Linewidth characteristics of vertical cavity surface emitting lasers due to external optical feedback," Science Journal, vol. 8, 2002.
10. Hamid Ali Abed Al-Asadi, "Theoretical investigation of spectral linewidth properties of double fused 1.3 um MQW-VCA in reflection and transition modes," Tikrit Journal for Pure Science, vol. 8, No. 2, 2002.
11. Boselin Prabhu S.R. and Sophia S., 'Mobility assisted dynamic routing for mobile wireless sensor networks', International Journal of Advanced Information Technology, 3(3), 2013.
12. Boselin Prabhu S.R. and Sophia S., 'A review of energy efficient clustering algorithm for connecting wireless sensor network fields', International Journal of Engineering Research and Technology, 2(4), 2013.
13. Hamid Ali Abed Al-Asadi, "Vertical cavity amplifiers and its cavity length dependence the saturation power and quantum efficiency," Tikrit Journal of Pure Science, vol. 9, No. 2, 2003.
14. Hamid Ali Abed Al-Asadi, "Effects of pump recycling technique on stimulated Brillouin scattering threshold: A theoretical model," Optics. Express, Vol. 18, No. 21, pp. 22339-22347 Impact factor: 3.88, 2010.
15. Boselin Prabhu S.R. and Sophia S., 'Variable power energy efficient clustering for wireless sensor networks', Australian Journal of Basic and Applied Sciences, 7(7), 2013.
16. Boselin Prabhu S.R. and Sophia S., 'Capacity based clustering model for dense wireless sensor networks', International Journal of Computer Science and Business Informatics, 5(1), 2013.
17. Hamid Ali Abed Al-Asadi, "Brillouin Linewidth Characterization in Single Mode Large Effective Area Fiber through the Co-Pumped Technique," International Journal of Electronics, Computer and Communications Technologies (IJECCCT), Vol. 1(1), pp. 16-20, 2010.
18. Boselin Prabhu S.R. and Sophia S., 'An integrated distributed clustering algorithm for dense WSNs', International Journal of Computer Science and Business Informatics, 8(1), 2013.
19. Boselin Prabhu S.R. and Sophia S., 'A research on decentralized clustering algorithms for dense wireless sensor networks', International Journal of Computer Applications, 57(20), 2012.
20. Hamid Ali Abed Al-Asadi, "Analytical study of nonlinear phase shift through stimulated Brillouin scattering in single mode fibre with pump power recycling technique," Volume 13 Number 10, Journal of Optics. Impact factor: 1.99, 2011.
21. Hamid Ali Abed Al-Asadi, "Architectural Analysis of Multi-Agents Educational Model in Web-Learning Environments," Journal of Emerging Trends in Computing and Information Sciences, Vol. 3, No. 6, June 2012.
22. Boselin Prabhu S.R. and Sophia S., 'Hierarchical distributed clustering algorithm for energy efficient wireless sensor networks', International Journal of Research in Information Technology, 1(12), 2013.
23. Boselin Prabhu S.R. and Sophia S., 'Real-world applications of distributed clustering mechanism in dense wireless sensor networks', International Journal of Computing Communications and Networking, 2(4), 2013.
24. Younis, O. and Fahmy, S., "HEED: A Hybrid Energy-Efficient Distributed Clustering Approach for Ad Hoc Sensor Networks," IEEE Transactions on Mobile Computing, 2004.
25. Chan, H. and Perrig, A., "ACE: An Emergent Algorithm for Highly Uniform Cluster Formation," First European Workshop on Sensor Networks (EWSN), 2004, Germany.